

Certificate of constancy of performance

Certificate number: 0958-CPR-1001/3

In compliance with Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction products Regulation or CPR), this certificate applies to the construction products

High-pressure decorative laminates (HPL) - Sheets based on thermosetting resins

Scope of certificate:

- Compact Laminate panels/sidings for interior wall and ceiling finishes (including suspended ceilings);
- Compact Laminate panels/sidings for exterior wall and ceiling finishes (including suspended ceilings).

The products and their performances are listed on page 2 of this certificate.

Placed on the market under the name or trade mark of

Trespa International B.V.

Wetering 20
NL-6002 SM WEERT
THE NETHERLANDS

and produced in the manufacturing plant

Trespa International B.V.
Wetering 20
NL-6002 SM WEERT
THE NETHERLANDS

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in (Annex ZA of the standard):

EN 438-7:2005

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the


constancy of performance of the construction product

This certificate was first issued on 5 December 2005 and will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

Culemborg, 5 August 2022



ir. R.F.R. Leppers
Director

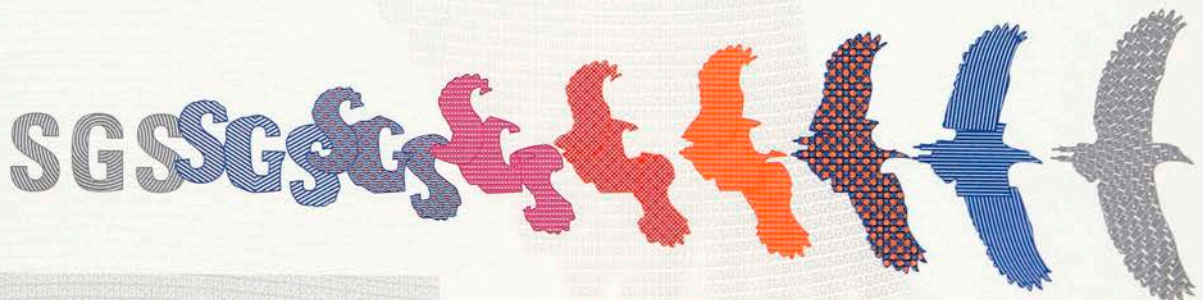

SCOPE:

Compact EDF - flame retardant grade - intended for external wall and ceiling finishes

product	METEON® FR (Type EDF)		PURA® NFC (Type EDF)
Nominal Thickness (mm)	6	≥ 8	8
Reaction to Fire (Class)	B-s2, d0	B-s1, d0	B-s2, d0

Compact CGF- flame retardant grade - intended for internal wall and ceiling finishes

product	Toplab® Vertical® FR (Type CGF)	
Nominal Thickness (mm)	6	≥ 8
Reaction to Fire (Class)	B-s2, d0	B-s1, d0